

Robinson90° flexible signposts

Flexible upright and signpost with Augustaflex® technology



Standard signpost



Robinson90° flexible signpost




INSTALLATION

ground sleeve
concrete foundation
Ø60.3mm - 40cmx40cmx40cm
Ø76mm - 50cmx50cmx50cm

plate
rubber traffic islands,
within anchors

ground plate
within concrete anchors

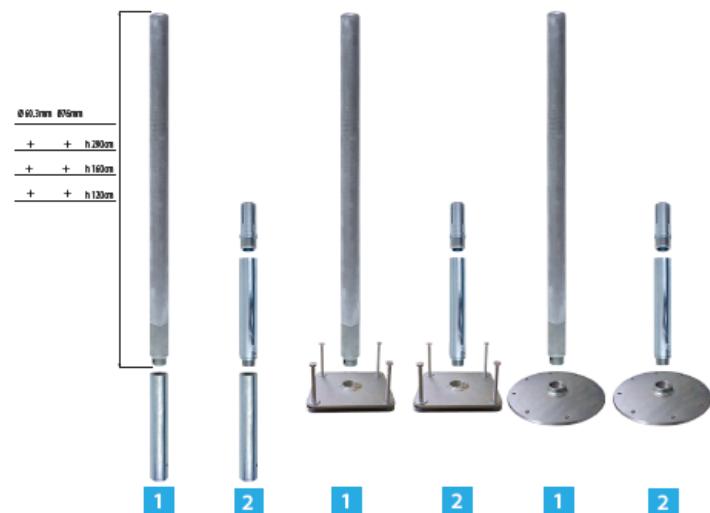


1 Robinson90° flexible signpost, Ø60.3m, Ø76mm,
recommended signpost's height 160cm, with special version up to 300cm

2 Robinson90° flexible upright, Ø60.3mm, Ø76mm,
The flexible upright is fixed to a standard post within the upper expander. The upper expander is selected based on
the wall thickness of the connected pole, with options ranging from 2mm to 3.6mm.
The total maximum height of the signpost can be adjusted according to the height of the post connected to th.
Customized signposts in various heights and diameters are available on request.

AUGUSTA FLEX®

Inovatívne riešenia pre dopravné značenie

- Robinson 90 – odolnosť do uhla 90°
- Augustaflex – odolnosť do uhla 40°
- Parkovacie stĺpiky – rôzne varianty
- Parkovacie stĺpiky – rôzne dizajny
- Oceľová konštrukcia
- Odolné voči kolízii s automobilom
- Odolné voči vandalizmu

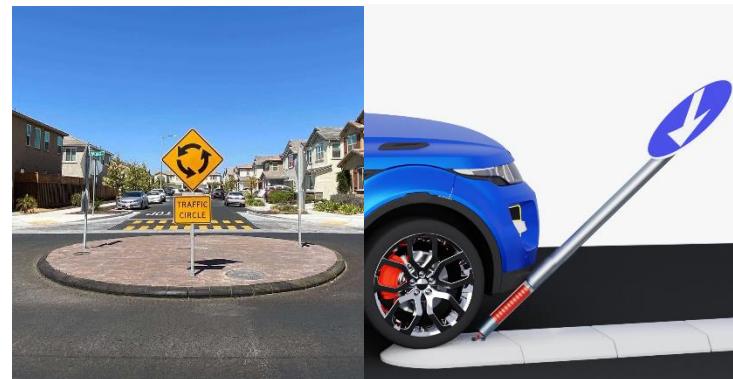

Augustaflex upright, Ø60.3mm/Ø76mm, recommended total maximum signpost's height - 400cm

INSTALLATION

ground sleeve

AF60....B1

AF76....B2

lower expander

AF60....B1

AF76....B2

ground plate

AF60....B1

AF76....B2

quick release

AF60...B1

AF76...B2

Augustaflex upright is easily fixed to a conventional post within upper expander and dynamometric key



| | | | | |
|----------------------|---|---|-------------------------|---|
| Type of installation | concrete foundation Ø60.3mm 40cmx40cmx40cm Ø76mm 50cmx50cmx50cm | existent signpost, present concrete base must meet quality, size and condition requirements | within concrete anchors | concrete foundation Ø60.3mm 40cmx40cmx40cm Ø76mm 50cmx50cmx50cm |
|----------------------|---|---|-------------------------|---|